

Pecan Eco M

GPE.0200



Ø
150
Pijpdiameter (mm)
Pipe diameter (mm)
Diamètre buse (mm)
Abgasstutzen (mm)

%
82,0
Efficiëntie
Efficiency
Efficacité
Effizienz

kW
8,0
Vermogen output (kW)
Capacity output (kW)
Puissance output (kW)
Leistung output (kW)

KG
310
Gewicht (kg)
Weight (kg)
Poids (kg)
Gewicht (kg)


Bovenaansluiting
Connection top
Raccordement dessus
Anschluss oben

Externe luchttoevoer
External air supply
Prise d'air extérieure
Externer Luftanschluss

Natuursteen
Natural stone
Pierre naturelle
Naturstein

B²
Bimsch 2
Bimsch 2
Bimsch 2
Bimsch 2

Hi²
HIGHLY INSULATED INTERIOR

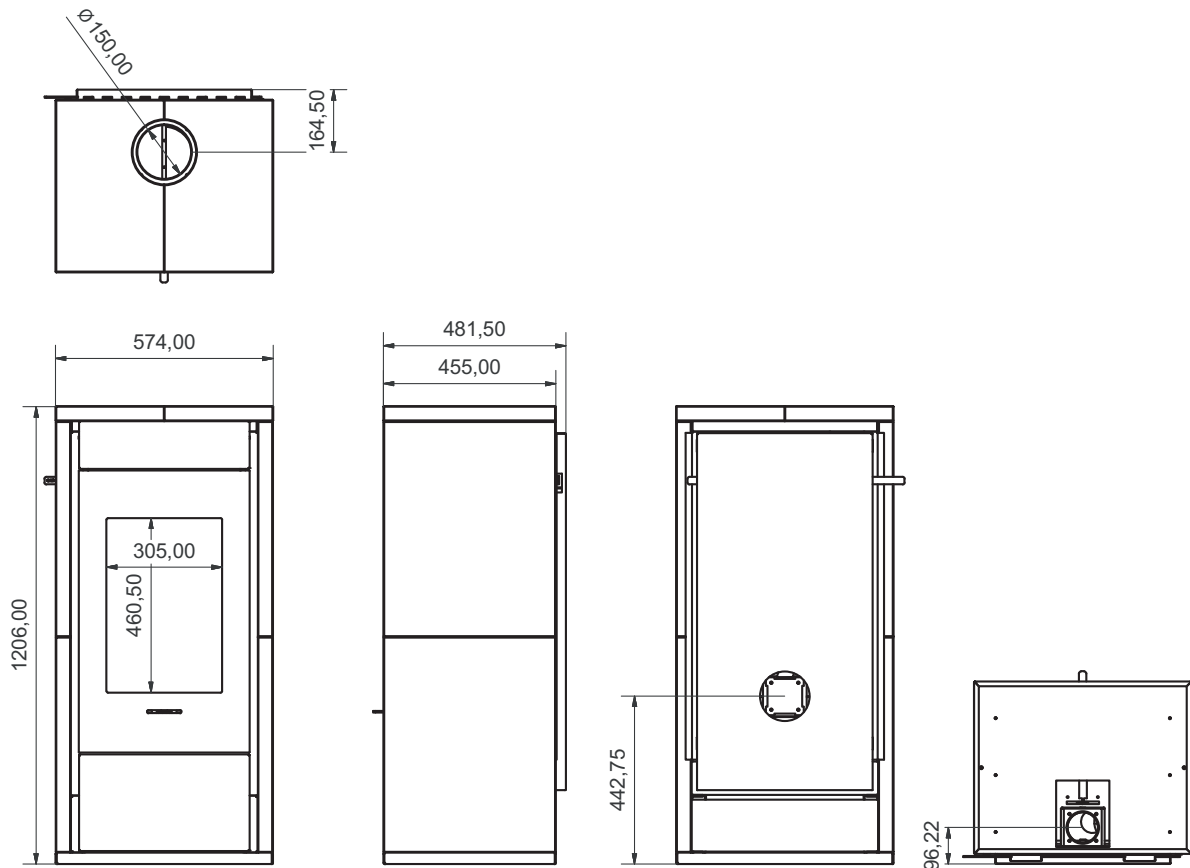

Wanders fires & stoves
Amtweg 4
7077 AL NETTERDEN
The Netherlands
Tel: +31(0)315 - 386 414
Fax: +31 (0)315 - 386 201
info@wanders.nl
www.wanders.nl

W wanders
fires & stoves